
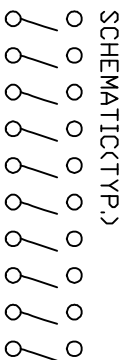
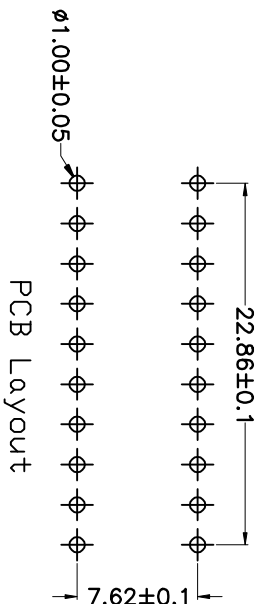
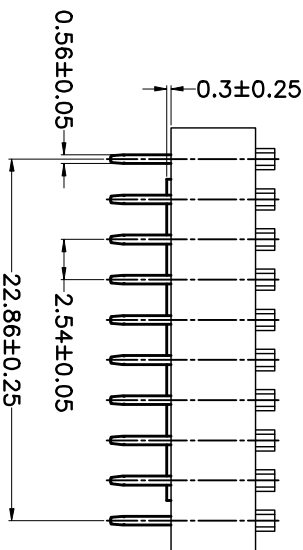
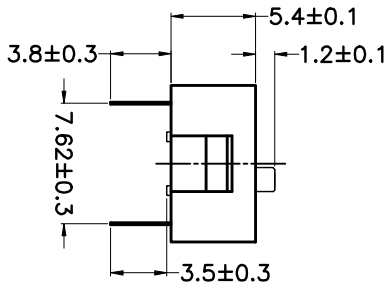
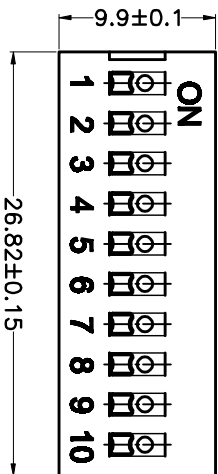


PRODUCT NO.	DSWB10LHGCT
RohS compliant	



- Note:**
1. All dimensions are in millimeters.
 2. General tolerance: $\pm 0.2\text{mm}$.
 3. Material:

Base: UL94V-0 PBT Thermoplastic (Black).
Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).
Actuators: UL94V-0 PA66 Thermoplastic (White).
Contact plating: Gold plating over nickel.
Pitting material: Epoxy.

4. Electrical

Electrical: 2000 Operations per switch 24/VDC, 25mA.
Non-Switching Rating: 100mA, 50/VDC.
Switching Rating: 25mA, 24/VDC
Contact Resistance: 100 mΩ Max. at initial.

5. Mechanical

Mechanical life: 2000 Operations per switch.
Stroke: 2.0mm.
Operation Temp: -20°C to 70°C.
Storage Temp: -40°C to 85°C.

6. PART NUMBER DESCRIPTION:

DS WB 10 L H G E T

- [Packing: 1" Tube R=Reel]
- [Finish B: 1 μ"-3 μ" Gold-plated R=10 μ" Gold-plated]
- [Finish: G=Full Gold S=Contact Gold-plated, Terminal-Tin-Plated]
- [Terminal: S=SMD type H=Strait:.....]
- [Actuator: T=Tepe sealed S=Low profile W/O Tepe L=Extension]
- [HP=Half Pitch IC=IC type PV=Plano type WB=WB type]

TOLERANCE UNLESS OTHERWISE SPECIFIED			INSPECTION COPY	
LINER	ANGLES			
.0 ± 0.30	0. ± 1°	PROJECTION		
.00 ± 0.20	0. ± 0.5°			
.000± 0.10	.00±	2013/07/02		
DESIGN	LU ER XIN			
DRAWING				
CHECK				
APPRO.				

 东莞市广誉实业有限公司 Dongguan Kingtek Industrial Co., Ltd							
TITLE							
BY DSWB SERIES PITCH 2.54mm							
PRODUCT FAMILY DSWB SERIES							
PRAT NO.							
DSWB10LHGCT							
FILE NO. DSWB10LHGCT-A							
SIZE		UNIT	SCALE	SHEET	SHEET	REV.	
A4		mm	FIT	1 OF 1	A		

东莞市广智实业有限公司
Dongguan Kingtek Industrial Co., Ltd.