
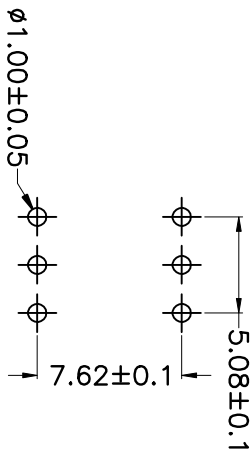
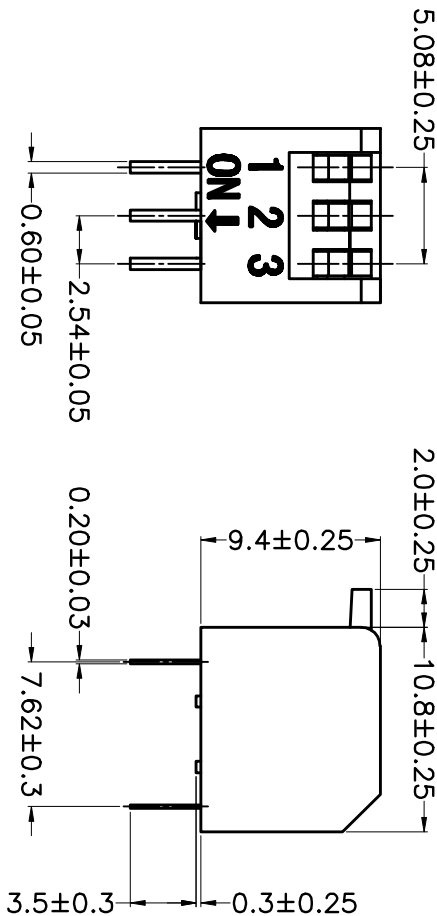



PRODUCT	NO.	RoHS compliant
DSDP03LHGET		



PCB Layout

- Note:**
1. All dimensions are in millimeters.
 2. General tolerance: $\pm 0.2\text{mm}$.
 3. Material:

Base: UL94V-0 PBT Thermoplastic (Black).
Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).
Actuators: UL94V-0 PA66 Thermoplastic (White).
Contact plating: Gold plating over nickel.
Pitting material: Epoxy.

4. Electrical

Electrical: 2000 Operations per switch 24/VDC, 25mA.
Non-Switching Rating: 100mA, 50/VDC.
Switching Rating: 25mA, 24/VDC
Contact Resistance: 100 mΩ Max. at initial.

5. Mechanical

Mechanical life: 2000 Operations per switch.
Operation Temp: -20°C to 70°C.
Storage Temp: -40°C to 85°C.

6. PART NUMBER DESCRIPTION:

DS DP 03 L H G E T

- [Packing: 1=Tube R=Reel]
- [FinishB=1 μ"-3 μ" Gold-plated R=10 μ" Gold-plated]
- [Finish: G=Full Gold S=Contact Gold-plated, Terminal-Tin-Plated]
- [Terminal: S=SMD type H=Strait:.....]
- [Actuator: T=Tepe sealed S=Low profile W/O Tepe L=Extension]
- [HP=Half Pitch IC=IC type PV=Plano type DP=DP type]

TOLERANCE UNLESS OTHERWISE SPECIFIED				INSPECTION COPY			
LINER	ANGLES	PROJECTION					
0 ± 0.30	0. ± 1°						
.00 ± 0.20	.0 ± 0.5°						
.000± 0.10	.00±						
DESIGN	LU ER XIN	2013/07/02					
DRAWING							
CHECK							
APPRO.							
FILE NO. DSDP03LHGET-A				TITLE			
SIZE UNIT SCALE SHEET REV.				BY DSDP SERIES PITCH 2.54mm			
A4 mm FIT 1 OF 1 A				PRODUCT FAMILY DSDP SERIES			
				PRAT NO. DSDP03LHGET			

东莞市广普实业有限公司
Dongguan Kingtek Industrial Co., Ltd.