

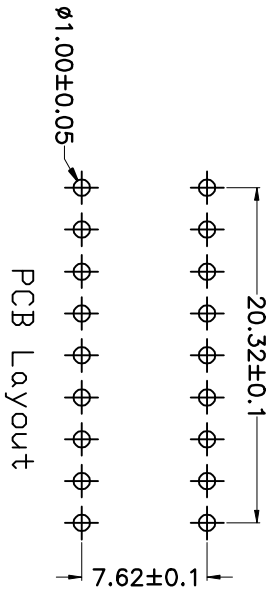
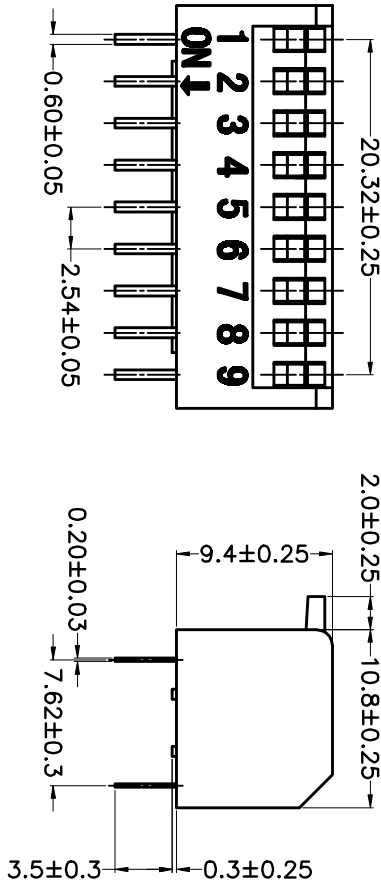



PRODUCT NO.	RoHS compliant
DSDP09LHGET	

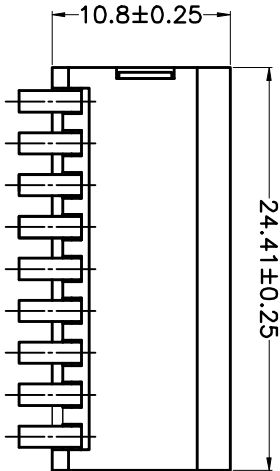

- Note:**
1. All dimensions are in millimeters.
 2. General tolerance: $\pm 0.2\text{mm}$.
 3. Material:

Base: UL94V-0 PBT Thermoplastic (Black).
Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).
Actuators: UL94V-0 PA66 Thermoplastic (White).
Contact plating: Gold plating over nickel.
Pitting material: Epoxy.

4. Electrical

Electrical: 2000 Operations per switch 24/VDC, 25mA.
Non-Switching Rating: 100mA, 50/VDC.
Switching Rating: 25mA, 24/VDC
Contact Resistance: 100 mΩ Max. at initial.

5. Mechanical

Mechanical life: 2000 Operations per switch.
Operation Temp: -20°C to 70°C.
Storage Temp: -40°C to 85°C.

6. PART NUMBER DESCRIPTION:

DS DP 09 L H G E T

- [Packing: 1" Tube R=Reel]
- [Finish B: 1 μ" - 3 μ" Gold-plated R=10 μ" Gold-plated]
- [Finish: G=Full Gold S-Contact Gold-plated, Terminal-Tin-Plated]
- [Terminal: S=SMD type H=Strait:.....]
- [Actuator: T=Tepe sealed S=Low profile W/O Tepe L=Extension]
- [H=P-Half Pitch IC=IC type PV=Plano type DP=DP type]

TOLERANCE UNLESS OTHERWISE SPECIFIED			INSPECTION COPY
LINER	ANGLES		
.0 ± 0.30	0. ± 1°		
.00 ± 0.20	.0 ± 0.5°		
.000± 0.10	.00±		
DESIGN	LU ER XIN		2013/07/02
DRAWING			
CHECK			
APPRO.			

 东莞市金捷实业有限公司 DongGuan Kingtek Industrial Co., Ltd			
TITLE			
BY DSDP SERIES PITCH 2.54mm			
PRODUCT FAMILY DSDP SERIES			
PRAT NO.			
DSDP09LHGET			
FILE NO. DSDP09LHGET-A			
SIZE	UNIT	SCALE	SHEET REV.
A4	mm	FIT	1 OF 1 A

东莞市广普实业有限公司
Dongguan Kingtek Industrial Co., Ltd.