


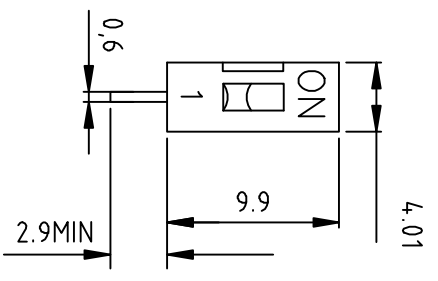


PRODUCT NO.	DSDA011H8ET
RoHS compliant	



P.C.B. LAYOUT

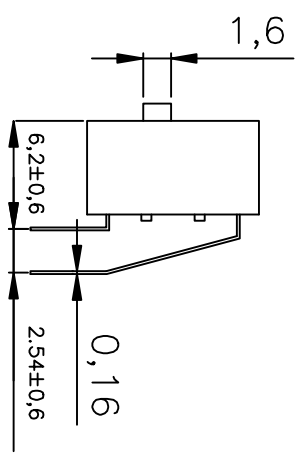

- Note:**
1. All dimensions are in millimeters.
 2. General tolerance: $\pm 0.2\text{mm}$.
 3. Material:

Base: UL94V-0 PBT Thermoplastic (Black).
 Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).
 Actuators: UL94V-0 PA66 Thermoplastic (White).
 Contact plating: Gold plating over nickel.
 Pitting material: Epoxy.

4. Electrical


Electrical: 2000 Operations per switch 24/VDC, 25mA.
 Non-Switching Rating: 100mA, 50/VDC.
 Switching Rating: 25mA, 24/VDC
 Contact Resistance: 100 mΩ Max. at initial.

5. Mechanical

Mechanical life: 2000 Operations per switch.
 Stroke: 2.0mm.
 Operation Temp: -20°C to 70°C.
 Storage Temp: -40°C to 85°C.

6. PART NUMBER DESCRIPTION:

DS DA XX L H G E I

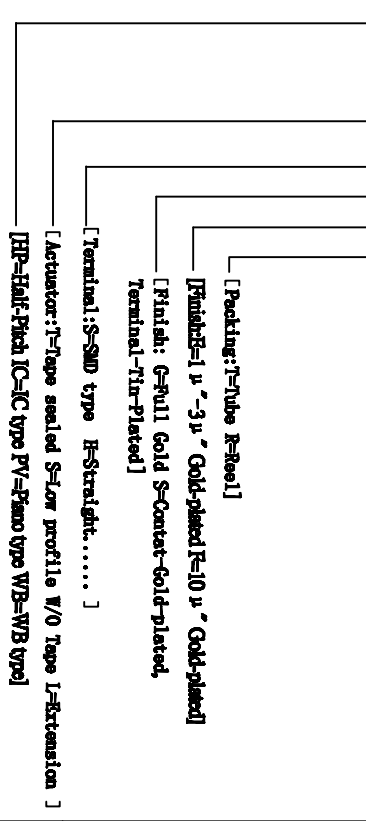

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION	
LINER	ANGLES	OUT	PROJECTION
0 ± 0.40	0 ± 1°		
.00 ± 0.30	.0 ± 0.5°		
.000 ± 0.20	.00 ±		

DESIGNER	LDI BR XIN	DATE	2013/07/26
CHECK			
APPROV			
FILE NO.	DSDA011H8ET		
SIZE	UNIT	SCALE	SHEET
A4	mm	1:1	1 OF 1

东莞市广誉实业有限公司
 Dongguan Kingtek Industrial Co., Ltd.

TITLE
 BY DSDA SERIES PITCH 2.54mm

PRODUCT FAMILY DSDA SERIES