

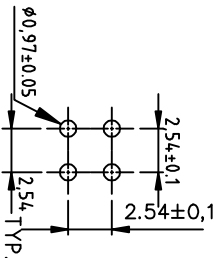



PRODUCT NO.	RoHS compliant
DSDA02LHSET	

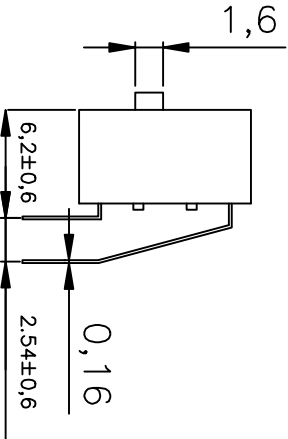

P.C.B. LAYOUT

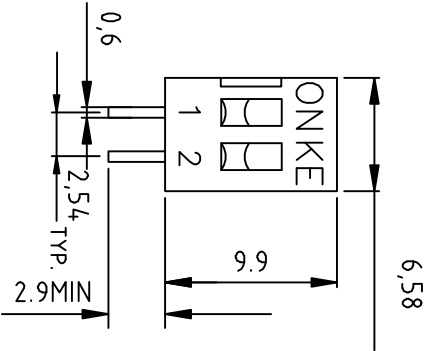

- Note:**
- 1.All dimensions are in millimeters.
 - 2.General tolerance: ±0.2mm.
 - 3.Material:

Base:UL94V-0 PBT Thermoplastic(Black).
Cover:UL94V-0 PBT Thermoplastic (Black/Red/Blue).
Actuators:UL94V-0 PA66 Thermoplastic(White).
Contact plating:Gold plating over nickel.
Pitting material:Epoxy.

4.Electrical

Electrical:2000 Operations per switch 24/VDC, 25mA.
Non-Switching Rating:100mA, 50/VDC.
Switching Rating:25mA, 24/VDC
Contact Resistance:100 mΩ Max.at initial.

5. Mechanical

Mechanical life:2000 Operations per switch.
Stroke:2.0mm.
Operation Temp:-20℃ to 70℃.
Storage Temp:-40℃ to 85℃.

6. PART NUMBER DESCRIPTION :

DS DA XX L H G E I

- [Packing:1=Tube R=Reel]
- [FinishB=1 μ"-3 μ" Gold-plated R=10 μ" Gold-plated]
- [Finish: G=Full Gold S-Contact-Gold-plated, Terminal-Tin-Plated]
- [Terminal:S=SMD type H=Straitght:.....]
- [Actuator:T=Tepe sealed S=Low profile W/O Tepe L=Extension]
- [HP=Half-Pitch IC=IC type PV=Plano type WB=WB type]

TOLERANCE UNLESS OTHERWISE SPECIFIED			INSPECTION	
LINER	ANGLES		OUT	
0 ± 0.40	0. ± 1°			
.00 ± 0.30	.0 ± 0.5°			
.000± 0.20	.00±			
DESIGN	LDI BY XIN	2013/07/02		
DRAWING				
CHECK				
APPROV				
东莞市广智实业有限公司 Dongguan Kingtek Industrial Co., Ltd.			REV. ECN NO. DR DATE	
TITLE BY DSDA SERIES PITCH 2.54mm				
PRODUCT FAMILY DSDA SERIES				
PART NO. DSDM02LHSET				
FILE NO. DSDM02LHSET-1				
SIZE UNIT SCALE SHEET REV.				
A4 mm FIT 1 OF 1 A				