PRODUCT NO.	RoHS compliant
DSDA06LHGET	

REV.	ECN NO.	DR	DATE

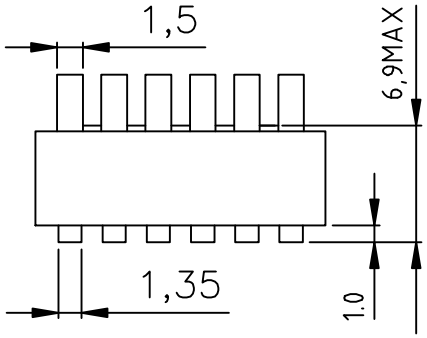

P.C.B. LAYOUT

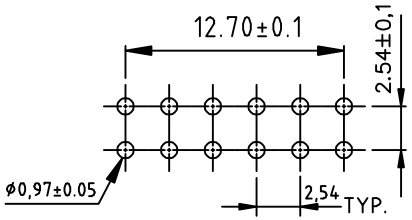

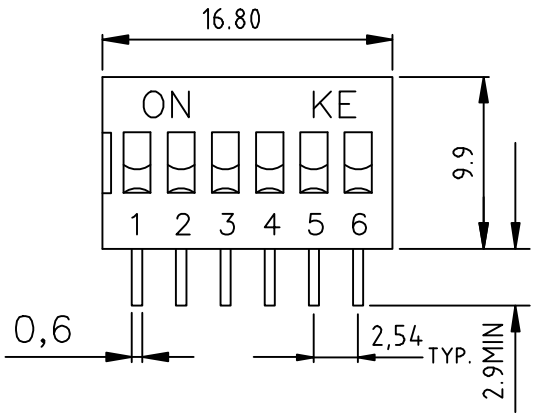

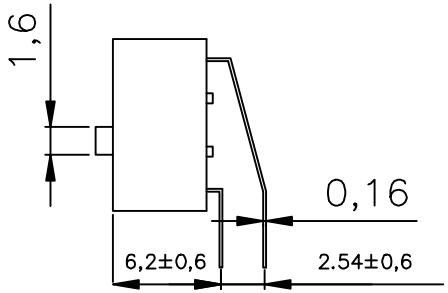

Note:

1. All dimensions are in millimeters.
2. General tolerance: ±0.2mm.
3. Material:
   - Base: UL94V-0 PBT Thermoplastic (Black).
   - Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).
   - Actuators: UL94V-0 PA66 Thermoplastic (White).
   - Contact plating: Gold plating over nickel.
   - Pitting material: Epoxy.
4. Electrical
   - Electrical: 2000 Operations per switch 24/VDC, 25mA.
   - Non-Swithing Rating: 100mA, 50/VDC.
   - Swithing Rating: 25mA, 24/VDC
   - Contact Resistance: 100 mΩ Max. at initial.
5. Mechanical
   - Mechanical life: 2000 Operations per switch.
   - Stroke: 2.0mm.
   - Operation Temp: -20℃ to 70℃.
   - Storage Temp: -40℃ to 85℃.
6. PART NUMBER DESCRIPTION:

DS DA XX L H G E T

- T: [Packing: T=Tube R=Reel]
- E: [Finish: E=1 μ"-3 μ" Gold-plated F=10 μ" Gold-plated]
- G: [Finish: G=Full Gold S=Contat-Gold-plated, Terminal-Tin-Plated]
- H: [Terminal: S=SMD type H=Straight.....]
- L: [Actuator: T=Tape sealed S=Low profile W/O Tape L=Extension]
- DA: [HP=Half-Pitch IC=IC type PV=Piano type WB=WB type]

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY
LINER	ANGLES	
.0 ± 0.40	0. ± 1°	PROJECTION
.00 ± 0.30	.0 ± 0.5°	
.000± 0.20	.00±	
DESIGN	LU ER XIN	2013/07/02
DRAWING		
CHECK		
APPRO.		

东莞市广睿实业有限公司
DongGuan Kingtek Industrial Co., Ltd.

TITLE: BY DSDA SERIES PITCH 2.54mm

PRODUCT FAMILY: DSDA SERIES

PRAT NO.: DSDA06LHGET

FILE NO.: 00000LHGET-A

SIZE	UNIT	SCALE	SHEET	REV.
A4	mm	FIT	1 OF 1	A