
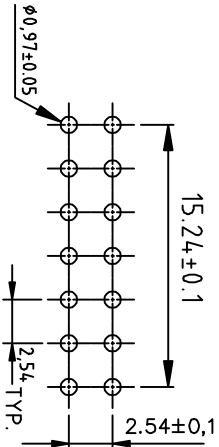
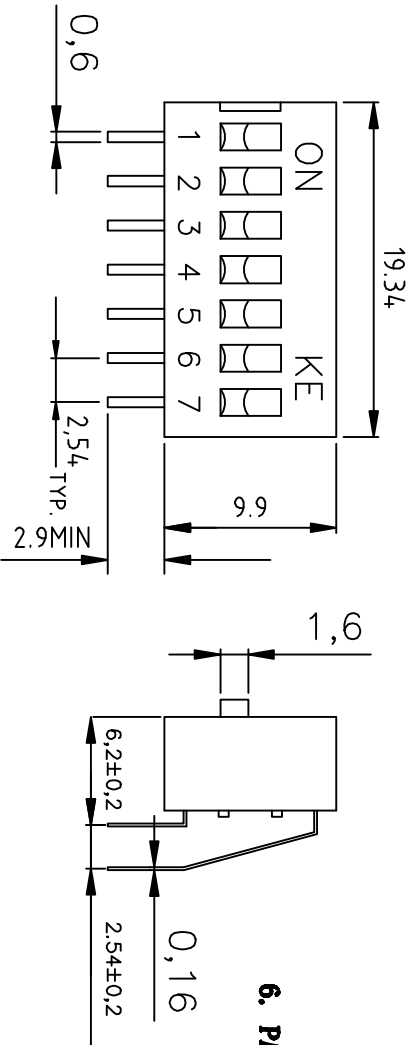


PRODUCT NO.	RoHS compliant
DSDA07LIBET	

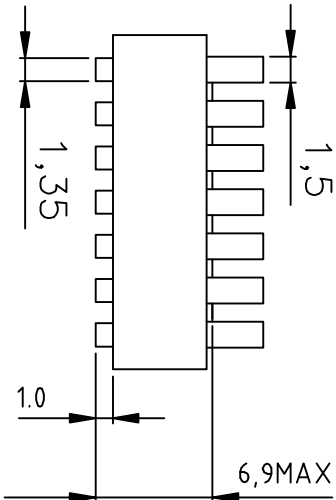


- Note:**
- 1.All dimensions are in millimeters.
 - 2.General tolerance: $\pm 0.2\text{mm}$.
 - 3.Material:

Base:UL94V-0 PBT Thermoplastic(Black).
 Cover:UL94V-0 PBT Thermoplastic(Black/Red/Blue).
 Actuators:UL94V-0 PA66 Thermoplastic(White).
 Contact plating:Gold plating over nickel.
 Pitting material:Epoxxy.

- 4.Electrical
 Electrical:2000 Operations per switch 24/VDC, 25mA.
 Non-Switching Rating:100mA, 50/VDC.
 Switching Rating:25mA, 24/VDC
 Contact Resistance:100 mΩ Max.at initial.
5. Mechanical

Mechanical life:2000 Operations per switch.
 Stroke:2.0mm.
 Operation Temp:-20℃ to 70℃.
 Storage Temp:-40℃ to 85℃.

6. PART NUMBER DESCRIPTION:

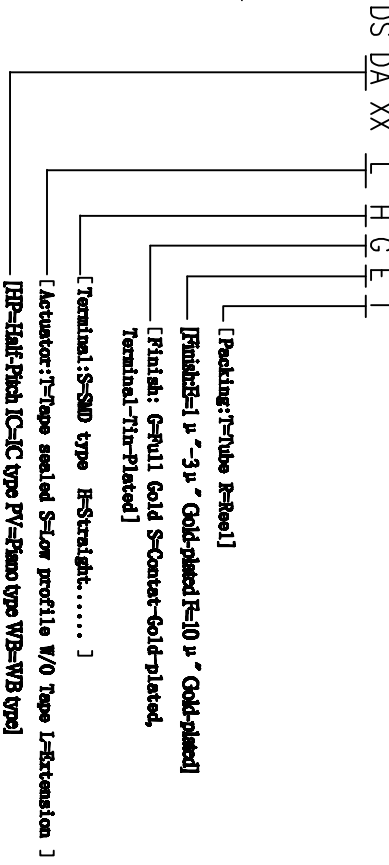

TOLERANCE UNLESS OTHERWISE SPECIFIED			INSPECTION	
LINER	ANGLES		OUT	
0 ± 0.40	0. ± 1°			
.00 ± 0.30	.0 ± 0.5°			
.000 ± 0.20	.00 ±			
DESIGN	LD ER XIN	2013/07/02		
DRAWING				
CHECK				
APPROV				
东莞市广普实业有限公司 DongGuon Kingtek Industrial Co., Ltd.			标题 BY DSDA SERIES PITCH 2.54mm	
PRODUCT FAMILY DSDA SERIES			FILE NO. DSDA07LIBET	
SIZE A4			UNIT mm	
SCALE FIT			REV. A	