
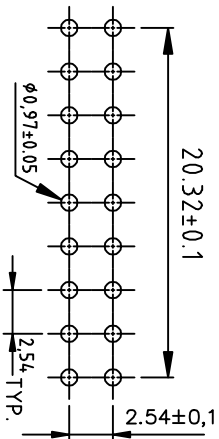
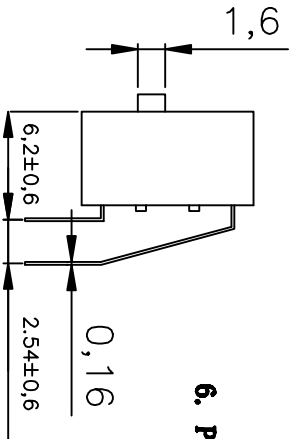
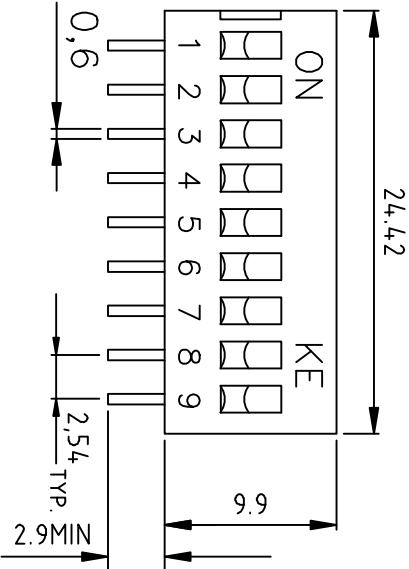


PRODUCT NO.	RoHS compliant
DSDA09LHRET	

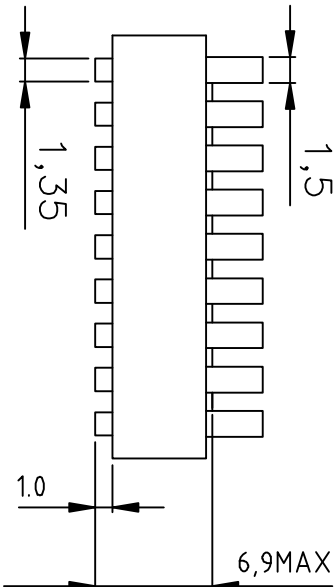

P.C.B. LAYOUT


- Note:
1. All dimensions are in millimeters.
 2. General tolerance: $\pm 0.2\text{mm}$.
 3. Material:

Base: UL94V-0 PBT Thermoplastic (Black).
Cover: UL94V-0 PBT Thermoplastic (Black/Red/Blue).
Actuators: UL94V-0 PA66 Thermoplastic (White).
Contact plating: Gold plating over nickel.
Pitting material: Epoxy.

4. Electrical
Electrical: 2000 Operations per switch 24/VDC, 25mA.
Non-Switching Rating: 100mA, 50/VDC.
Switching Rating: 25mA, 24/VDC
Contact Resistance: 100 mΩ Max. at initial.

5. Mechanical
Mechanical life: 2000 Operations per switch.
Stroke: 2.0mm.
Operation Temp: -20°C to 70°C.
Storage Temp: -40°C to 85°C.

6. PART NUMBER DESCRIPTION:

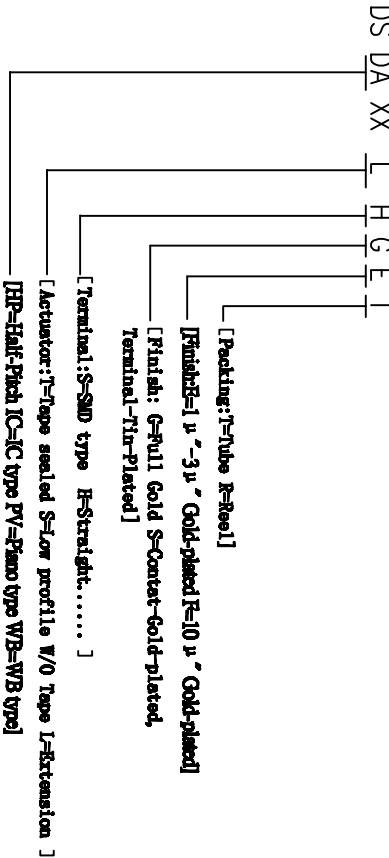

TOLERANCE UNLESS OTHERWISE SPECIFIED			INSPECTION	
LAYER	ANGLES	PROJECTION	OUT	
0 ± 0.40	0. ± 1°			
.00 ± 0.30	.0 ± 0.5°			
.000 ± 0.20	.00 ±			
DESIGN	LD BY XIN	2013/07/02		
DRAWING				
CHECK				
APPROVAL				
TITLE			东莞市广智实业有限公司 Dongguan Kingtek Industrial Co., Ltd.	
BY DSDA SERIES PITCH 2.54mm				
PRODUCT FAMILY DSDA SERIES				
PART NO. DSDA09LHRET				
FILE NO. DSDA09LHRET-1				
CHECK	SIZE	UNIT	SCALE	REV.
A4	mm	mm	1:1	A