

PRODUCT NO.	RoHS compliant
DSHP08TSGET	

NOTES :1.Specification:

- 1>.Operating force:1000gf Max
- 2>.Operating Temperature: -40° to+85°
- 3>.Storage Temperature: -40° to+85°
- 4>.Electrical life:1000cycles 25mA 24VDC
- 5>.Mechanical Life: 3000cycles Operations

2. PLATING:






GOLD FLASH 1u”(min.) SOLDER TAIL,
3u” GOLD PLATING ON THE CONTACT AREA,
WITH 50u” NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION :


DSHP XX I S G E I

- [包装方式: T=管装 R=Reel]
- [电镀层: B=镀锡部 3u” 焊脚部 1.2u” G=镀金部 3u” 焊脚部 3u” F=镀金部 10u” 焊脚部 10u”]
- [G=镀金 S=内镀金(接触部) 外镀锡(焊脚部)]
- [脚型: S脚 / J脚 / I脚 / A脚 / Z脚]
- [T=低推胶 S=低推不粘胶 L=长推]
- [产品P数: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P]

[Schematic]

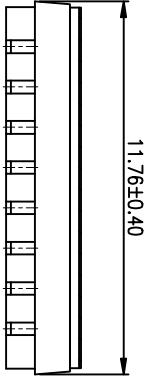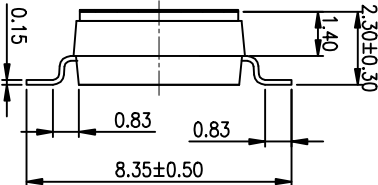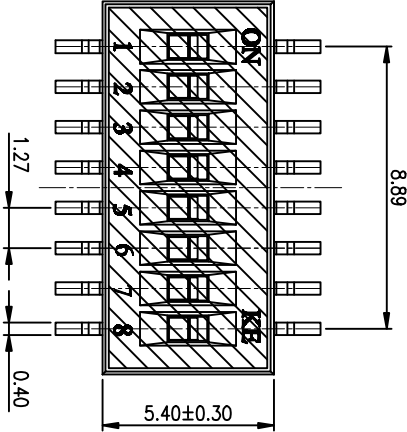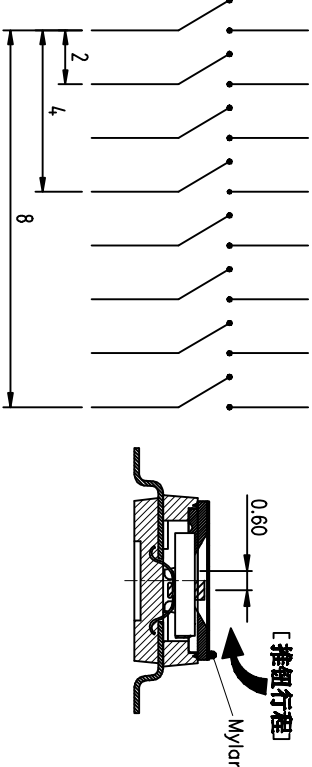

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

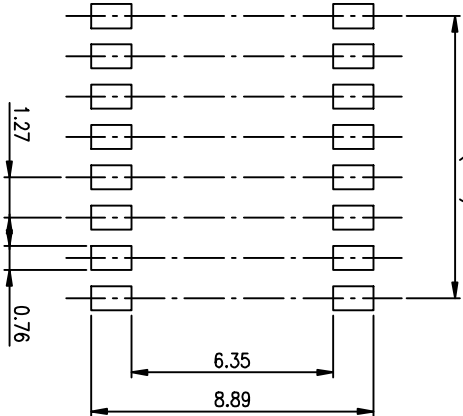

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Beryllium Copper	3u” Gold
④	Terminal	Brass	1u” Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u” Gold
⑦	Mylar	UL94 V0	0.05mm

TOLERANCE UNLESS OTHERWISE SPECIFIED			INSPECTION COPY	
LINER	ANGLES		PROJECTION	
0 ± 0.25	0 ± 2°			
100 ± 0.15	10 ± 1°			
1000 ± 0.10	100 ± 0.5°			
DESIGN	kathy	03/20/12		
DRAWING				
CHECK				
APPRO.				

FILE NO.	DSHP08TSGET-A
SIZE	UNIT SCALE SHEET REV.
A4	mm 2 : 1 10F 1 A

东莞市广智实业有限公司
Dongguan Kingtek Industrial Co., Ltd.

BY DSHP SERIES PITCH 1.27mm

PRODUCT FAMILY DSHP SERIES

PRAT NO. DSHP08TSGET

FILE NO. DSHP08TSGET-A

SIZE UNIT SCALE SHEET REV.

A