

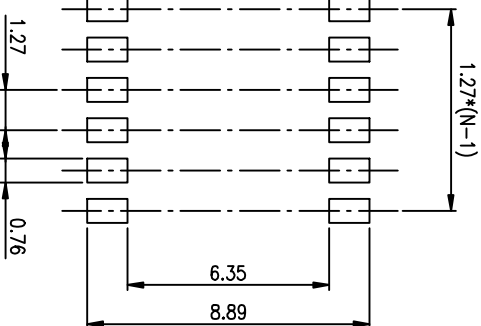
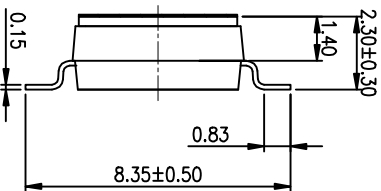





PRODUCT NO.	RoHS compliant
DSHP06TSGE1	

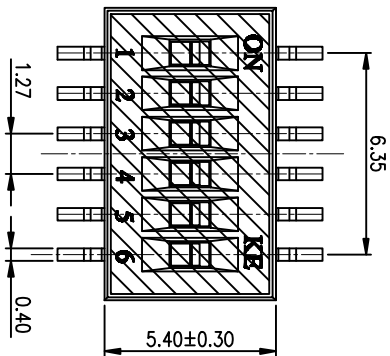

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)



[Schematic]



DSHP XX I S G E I
[包装方式: T=管装 R=Reel]
[电镀层: B=镀锡或3u"焊脚部1.2u" G=镀金或3u"焊脚部3u" F=镀镍或10u"焊脚部10u"]
[G=镀金 S=内镀金(接触部) 外镀锡(焊脚部)]
[脚型: S脚 / J脚 / I脚 / A脚 / L脚]
[T=低推贴胶 S=低推不贴胶 L=长推]
[产品规格: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P]

- NOTES :1.Specification:
- 1>.Operating force:1000gf Max
 - 2>.Operating Temperature: -40° to+85°
 - 3>.Storage Temperature: -40° to+85°
 - 4>.Electrical life:1000cycles 25mA 24VDC
 - 5>.Mechanical Life:3000cycles Operations
2. PLATING:
GOLD FLASH 1u"(min.) SOLDER TAIL,
3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATING OVERALL.
3. PART NUMBER DESCRIPTION :

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Beryllium Copper	3u" Gold
④	Terminal	Brass	1u" Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u" Gold
⑦	Mylar	UL94 V0	0.05mm

TOLERANCE UNLESS OTHERWISE SPECIFIED				INSPECTION COPY	
LINER	ANGLES			PROJECTION	
0 ± 0.25	0. ± 2°				
100 ± 0.15	.0 ± 1°				
1000± 0.10	.00± 0.5°				
DESIGN	kathy	03/20/12			
DRAWING					
CHECK					
APPRO.					
东莞市广智实业有限公司 Dongguan Kingtek Industrial Co., Ltd.				TITLE	
BY DSHP SERIES PITCH 1.27mm				PRODUCT FAMILY DSHP SERIES	
PRAT NO. DSHP06TSGE1				FILE NO. DSHP06TSGE1-A	
SIZE UNIT SCALE SHEET REV.				A4 mm 2 : 1 10F-1 A	