PRODUCT NO.	RoHS compliant
DSHP05TSGER	

REV.	ECN NO.	DR	DATE

NOTES :1.Specification:

1>.Operating force:1000gf Max

2>.Operating Temperature:-40° to+85°

3>.Storage Temperature::-40° to+85°

4>.Electricalife Life:1000cycles 25mA 24VDC

5>.Mechanical Life:3000cycles Operations

2. PLATING:
GOLD FLASH 1u"(min.) SOLDERTAIL,
3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATINGOVERALL.

3. PART NUMBER DESCRIPTION :

DSHP XX T S G E T

- [包装方式：T=管装 R=Reel]
- [电镀层：E=接触部3u"焊脚部1-2u" G=接触部3u" 焊脚部3u" F=接触部10u"焊脚部10u"
- [G=镀全金 S=内镀金(接触部)外镀锡（焊脚部）]
- [脚型：S脚 / J脚 / H脚 / A脚 / Z脚]
- [T=低推贴胶 S=低推不贴胶 L=长推]
- [产品P数：02=2P 04=4P 06=6P 08=8P 10=10P 12=12P]

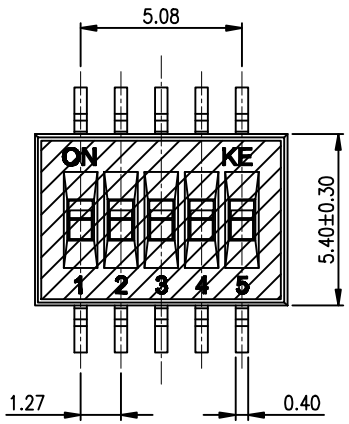

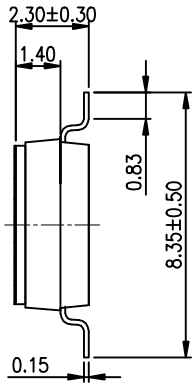



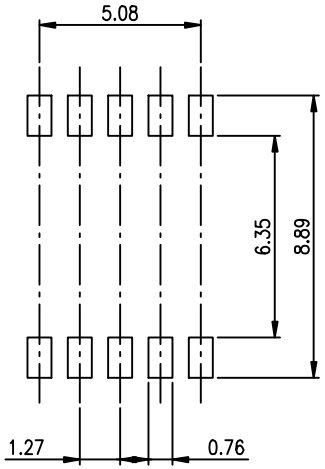

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)



(Construction)



Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Beryllium Copper	3μ' Gold
④	Terminal	Brass	1μ' Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3μ' Gold
⑦	Mylar	UL94 V0	0.05mm

TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION
LINER	ANGLES	COPY
.0 ± 0.25	0. ± 2°	PROJECTION
.00 ± 0.15	.0 ± 1°	
.000± 0.10	.00± 0.5°	
DESIGN	kathy	03/20/12'
DRAWING		
CHECK		
APPRO.		

东莞市广督实业有限公司
DongGuan Kingtek Industrial Co., Ltd.

TITLE
BY DSHP SERIES PITCH 1.27mm

PRODUCT FAMILY DSHP SERIES

PRAT NO. DSHP05TSGER

FILE NO. DSHP05TSGER-A

SIZE	UNIT	SCALE	SHEET	REV.
A4	mm	2 : 1	1 OF 1	A