
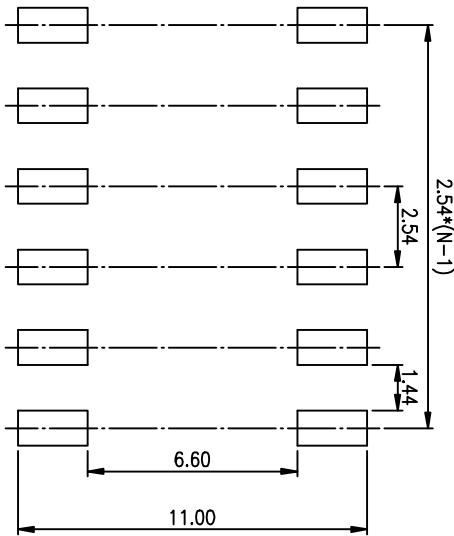


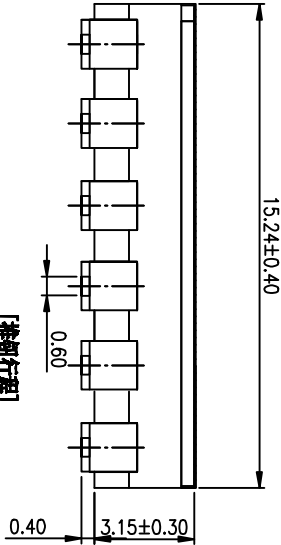
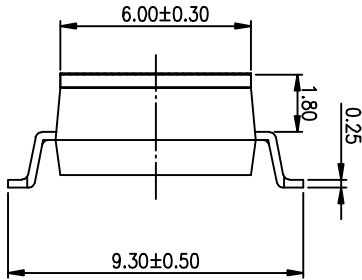


PRODUCT NO.	RoHS compliant
DS1C061SGER	

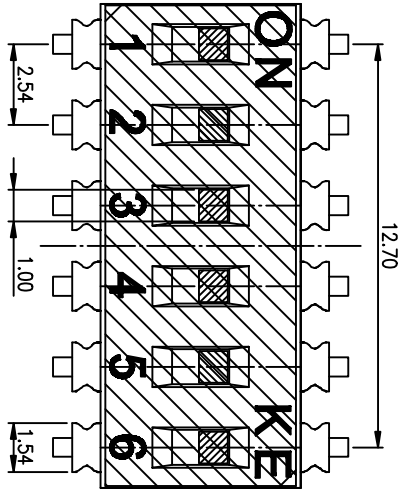

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

- NOTES :
- 1> Operating force: 1000gf Max
 - 2> Operating Temperature: -40° to +85°
 - 3> Storage Temperature: -40° to +85°
 - 4> Mechanical Life: 3000cycles minimum
 - 5> Electrical Life: 2000cycles 25mA 24VDC
2. PLATING:
- GOLD FLASH 1u"(min.) SOLDER TAIL, 3u" GOLD PLATING ON THE CONTACT AREA, WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION

DSIC XX I S G E R

[包装方式: T=管装 R=盒装]

[电镀层: B=镀锡3u" G=镀镍3u" / 焊盘3u"-2u"]

[G=镀金 S=内金外镀]

[脚型: S脚 / J脚 / D脚 / A脚 / Z脚]

[T=低阻抗 S=低阻抗度 L=长推]

[产品代码: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P]

Number	Part Name	Material	Finished
①	Actuator	UL94 VO	White
②	Cover	UL94 VO	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 VO	Black
⑥	Terminal Contact	Brass	3u"Gold
⑦	Mylar	UL94 VO	0.05mm

TOLERANCE UNLESS OTHERWISE SPECIFIED	INSPECTION COPY
LINER	PROJECTION
0 ± 0.25	0. ± 2°
.00 ± 0.15	.0 ± 1°
.000± 0.10	.00± 0.5°
DESIGN	2012/04/12
DRAWING	
CHECK	
APPRO.	

FILE NO.	SIZE	UNIT	SCALE	SHEET	REV.
A4	mm	2 : 1	1 OF 1	A	