

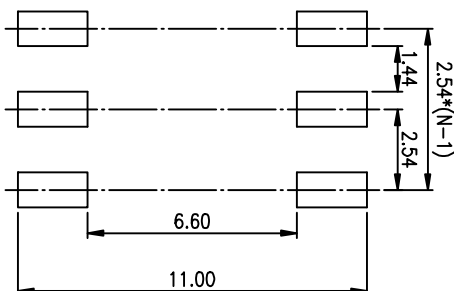
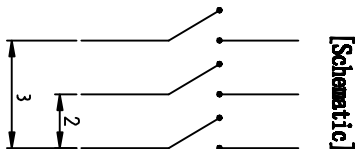
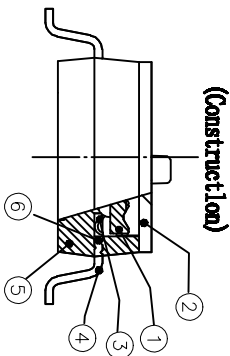

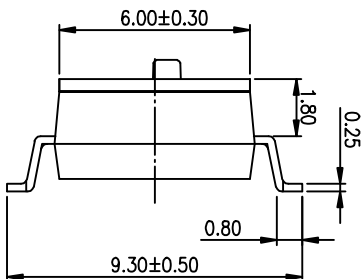


PRODUCT NO.	RoHS compliant
DISCO3.SGSET	

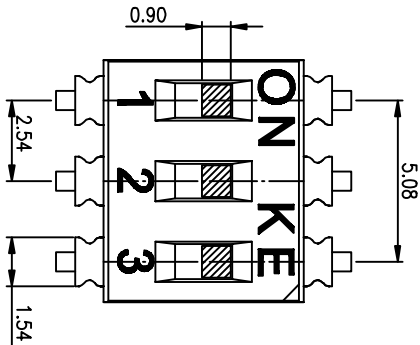

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

- NOTES :
- 1>.Specification:
 - 1>.Operating force:1000gf Max
 - 2>.Operating Temperature: -40° to+85°
 - 3>.Storage Temperature: -40° to+85°
 - 4>.Mechanical Life:3000cycles minimum
 - 5>.Electrical Life:2000cycles minimum
 2. PLATING:
GOLD FLASH 1u"(min.) SOLDER TAIL,
3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION

DISC XX I S G E I
[包装方式: I=管装 R=盒装]
[电镀层: B=镀镍3u" G=镀金3u" / 焊盘镀1-2u"]
[G=镀金 S=内金外镀]
[厚度: S脚 / J脚 / 焊脚 / A脚 / Z脚]
[T=低温制程 S=低温制程 L=常温]
[产品代码: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P]

Number	Part Name	Material	Finished	TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION	COPY		TITLE	
①	Actuator	UL94 V0	White	0 ± 0.25	0. ± 2°	PROJECTION	BY DISC SERIES PITCH 2.54mm	PRAT NO.	DISCO3.SGSET	FILE NO. DISCO3.SGSET-A
②	Cover	UL94 V0	Black	.00 ± 0.15	.0 ± 1°	CHECK	PRODUCT FAMILY DISC SERIES	SIZE	UNIT SCALE	SHEET REV.
③	Movable	Copper Alloy	3u"Gold	.000± 0.10	.00± 0.5°	DRAWING	2012/04/12	A4	mm	2 : 1
④	Terminal	Brass	1u"Gold							
⑤	Base	UL94 V0	Black							
⑥	Terminal Contact	Brass	3u"Gold							