

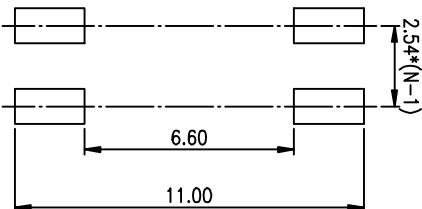

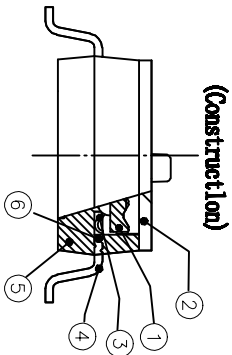

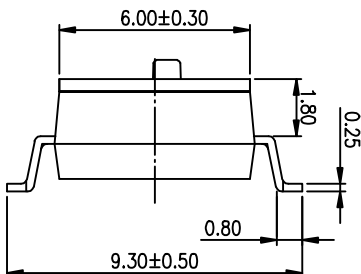


PRODUCT NO.	RoHS compliant
DISC02LSGET	

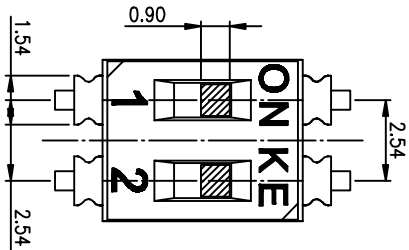

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)



- NOTES :
- 1>.Specification:
- 1>.Operating force:1000gf Max
- 2>.Operating Temperature: -40° to+85°
- 3>.Storage Temperature: -40° to+85°
- 4>.Mechanical Life:3000cycles minimum
- 5>.Electrical Life:2000cycles minimum
2. PLATING:
- GOLD FLASH 1u"(min.) SOLDER TAIL,
- 3u" GOLD PLATING ON THE CONTACT AREA,
- WITH 50u" NICKEL UNDERPLATINGOVERALL.

3. PART NUMBER DESCRIPTION

DISC XX I S G E I

[包装方式: I=管装 R=Reel]

[电镀层: B=镀锡3u" G=镀金3u" / 焊盘3u"-2u"]

[G=镀金 S=内金外镀]

[脚型: S脚 / J脚 / 0脚 / A脚 / Z脚]

[T=低温制程 S=低温制程 L=长推]

[产品规格: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P]

Number	Part Name	Material	Finished	TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION	COPY		TITLE	
①	Actuator	UL94 V0	White	0 ± 0.25	0. ± 2°	PROJECTION	BY DISC SERIES	PITCH 2.54mm	FILE NO.	DISC02LSGET-A
②	Cover	UL94 V0	Black	.00 ± 0.15	.0 ± 1°	DESIGN	PRODUCT FAMILY	DISC SERIES	SIZE	UNIT SCALE SHEET REV.
③	Movoble	Copper Alloy	3u"Gold	.000± 0.10	.00± 0.5°	DRAWING	PRAT NO.	DISC02LSGET	mm	2 : 1 1OF 1 A
④	Terminal	Brass	1u"Gold			CHECK				
⑤	Base	UL94 V0	Black			APPRO.				
⑥	Terminal Contact	Brass	3u"Gold							