

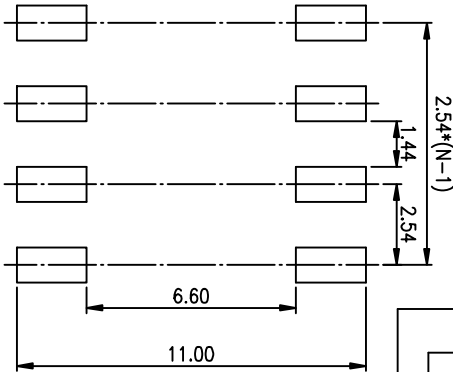

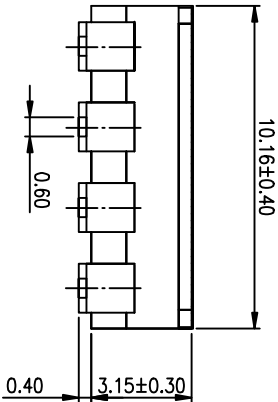
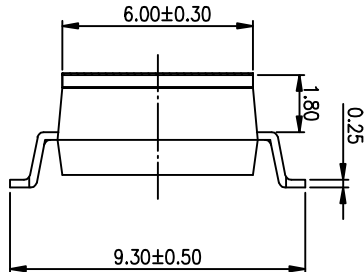


PRODUCT NO.	DS1004TSSGER
RoHS compliant	

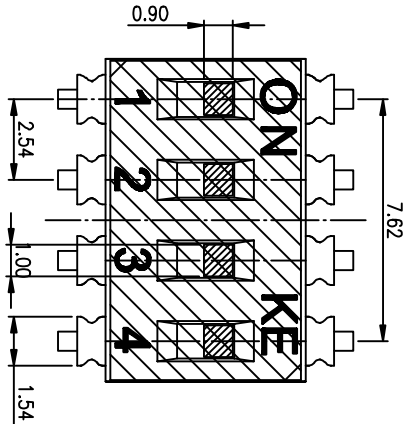


RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

- NOTES :
- 1>.Operating force:1000gf Max
 - 2>.Operating Temperature:-40° to+85°
 - 3>.Storage Temperature::-40° to+85°
 - 4>.Mechanical Life:3000cycles minimum
 - 5> Electrical Life:2000cycles 25mA 24VDC
2. PLATING:
GOLD FLASH 1u"(min.) SOLDER TAIL,
3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATINGOVERALL.

3. PART NUMBER DESCRIPTION

DS1C XX I S G E R
[包装方式: I=管装 R=盒装]
[电镀层: B=镀锡3u" G=镀镍3u" / 焊盘3u"-2u"]
[G=鍍金 S=內金外鍍]
[厚度: S脚 / J脚 / 0脚 / A脚 / Z脚]
[T=低浪高度 S=低浪不高度 I=长推]
[产品代码: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P]

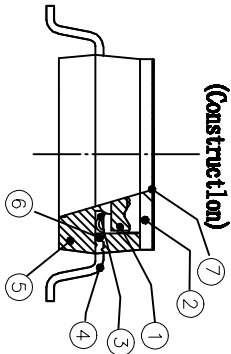

Number	Part Name	Material	Finished	TOLERANCE UNLESS OTHERWISE SPECIFIED	INSPECTION COPY	FILE NO.
①	Actuator	UL94 VO	White	LINER 0 ± 0.25 ANGLES 0. ± 2°	PROJECTION	DS1C04SSGER-A
②	Cover	UL94 VO	Black	.00 ± 0.15 .0 ± 1°		SIZE UNIT SCALE SHEET REV.
③	Movable	Copper Alloy	3u"Gold	.000± 0.10 .00± 0.5°		A4 mm 2 : 1 1OF 1 A
④	Terminal	Brass	1u"Gold	DESIGN 2012/04/12		
⑤	Base	UL94 VO	Black	DRAWING		
⑥	Terminal Contact	Brass	3u"Gold	CHECK		
⑦	Mylar	UL94 VO	0.05mm	APPRO.		