

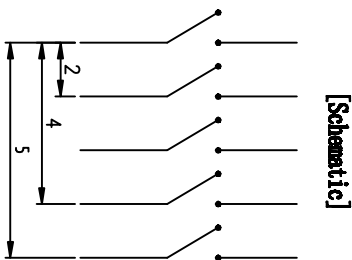

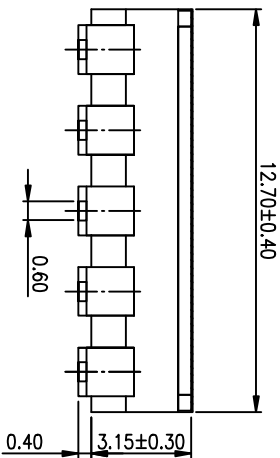
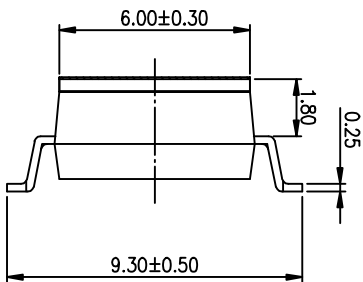


PRODUCT NO.	1
RoHS compliant	2
DSIC05TSGER	3

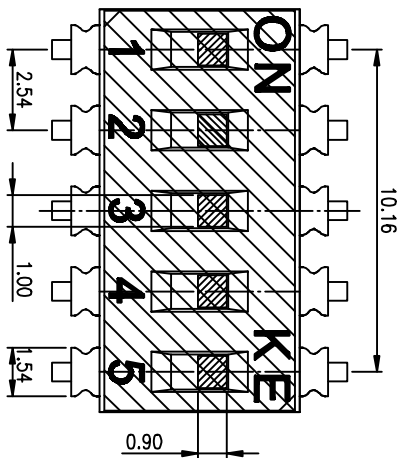

(Construction)

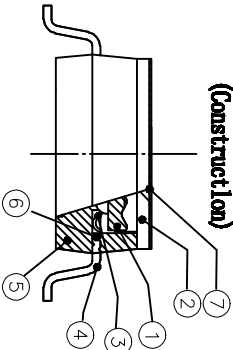


REV.	ECN NO.	DR	DATE

- NOTES :
- 1> Operating force: 1000gf Max
 - 2> Operating Temperature: -40° to +85°
 - 3> Storage Temperature: -40° to +85°
 - 4> Mechanical Life: 3000cycles minimum
 - 5> Electrical Life: 2000cycles 25mA 24VDC
2. PLATING:
GOLD FLASH 1u"(min.) SOLDER TAIL,
3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION

DSIC XX I S G E R

[包装方式: I=管装 R=盒装]
[电镀层: B=镀锡3u" G=镀金3u" / 焊盘3u"-2u"]
[G=鍍金 S=內金外鍍]
[脚型: S脚 / J脚 / 0脚 / A脚 / Z脚]
[T=低粘黏度 S=低粘不黏度 L=长推]
[产品散: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P]

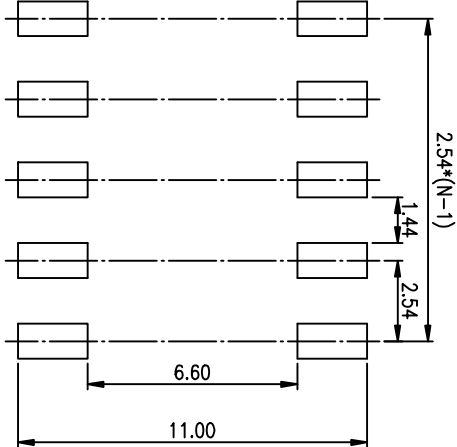

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

Number	Part Name	Material	Finished	TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION COPY		TITLE			
①	Actuator	UL94 VO	White	LINER		PROJECTION		BY DSIC SERIES PITCH 2.54mm			
②	Cover	UL94 VO	Black	0 ± 0.25		0. ± 2°		PRODUCT FAMILY DSIC SERIES			
③	Movble	Copper Alloy	3u"Gold	.00 ± 0.15		.0 ± 1°		PRAT NO. DSIC05TSGER			
④	Terminal	Brass	1u"Gold	.000± 0.10		.00± 0.5°		FILE NO. DSIC05TSGER-A			
⑤	Base	UL94 VO	Black	DESIGN		kathy		SIZE UNIT SCALE SHEET REV.			
⑥	Terminal Contact	Brass	3u"Gold	CHECK				A4 mm 2 : 1 1 OF 1 A			
⑦	Myar	UL94 VO	0.05mm	APPRO.							

东莞市广富实业有限公司
Dongguan Kingtek Industrial Co., Ltd.