



PRODUCT NO.	1
RoHS compliant	2
DISC10TSGER	3

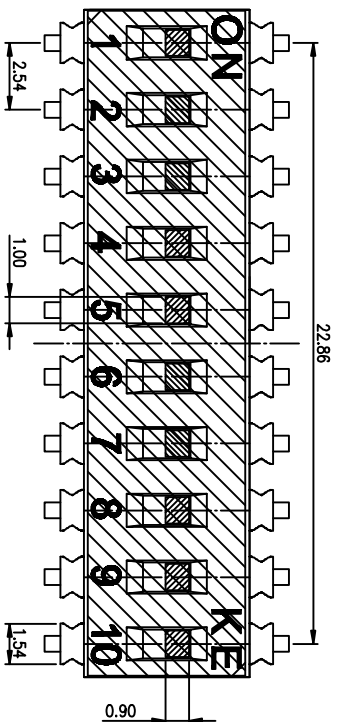


- NOTES :
- 1>.Operation force:1000gf Max
 - 2>.Operating Temperature: -40° to+85°
 - 3>.Storage Temperature:: -40° to+85°
 - 4>.Mechanical Life:3000cycles minimum
 - 5> Electrical Life:2000cycles 25mA 24VDC
2. PLATING:
GOLD FLASH 1u"(min.) SOLDER TAIL,
3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATINGOVERALL.


3. PART NUMBER DESCRIPTION

DISC XX I S G E R




【包装方式: T=管装 R=盒装】
【电镀层: B=镀锡或3u"G=镀金或3u"厚镀金-2u"]
【G=镀金 S=内金外镀】
【脚型: S脚 / J脚 / 直脚 / A脚 / Z脚】
【T=低档封装 S=低档封装 L=长插】
【产品数量: 02=2P 04=4P 06=6P 08=8P 10=10P 12=12P】

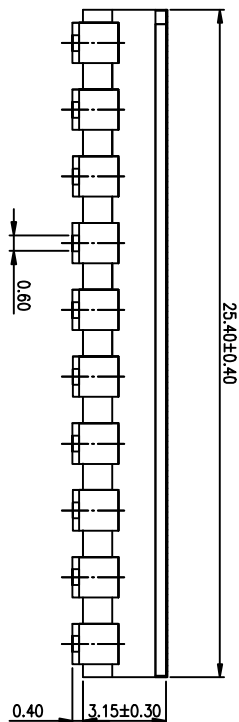

[Schematic]

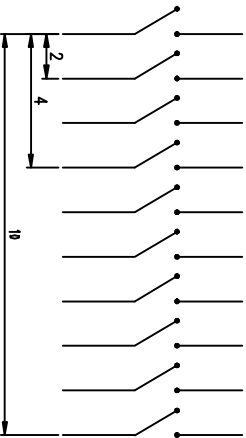

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)

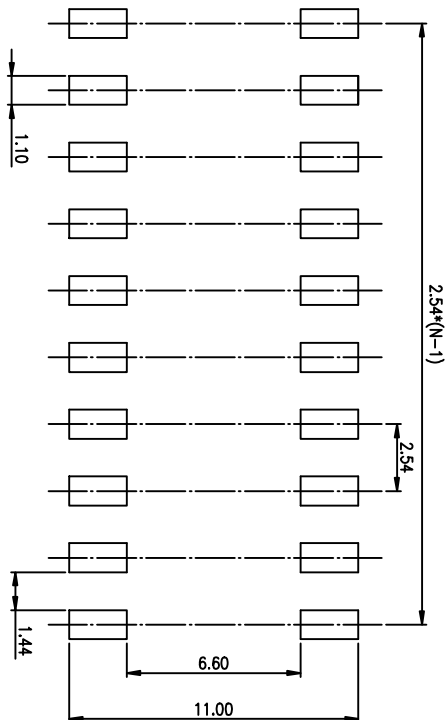

Number	Part Name	Material	Finished	TOLERANCE UNLESS OTHERWISE SPECIFIED		INSPECTION	TITLE	
①	Actuator	UL94 VO	White	LINER		COPY	BY DISC SERIES PITCH 2.54mm	
②	Cover	UL94 VO	Black	0 ± 0.25		0. ± 2°	PRODUCT FAMILY DISC SERIES	
③	Movable	Copper Alloy	3u"Gold	.00 ± 0.15		.0 ± 1°	DRAWING	
④	Terminal	Brass	1u"Gold	.000± 0.10		.00± 0.5°	PRAT NO.	
⑤	Base	UL94 VO	Black	DESIGN		kathy	2012/04/12	
⑥	Terminal Contact	Brass	3u"Gold	CHECK			FILE NO.	
⑦	Myar	UL94 VO	0.05mm	APPRO.			SIZE UNIT SCALE SHEET REV.	
							A4 mm 2 : 1 1OF 1 A	

东莞市广誉实业有限公司
Dongguan Kingke Industrial Co., Ltd.